

# BATTERY DRIVE, MOBILE TYPE STANDALONE THERMAL PRINTER 2" EASY LOADING MODEL

## FTP-628WSL110/120

### ■ OVERVIEW


The supply voltage of the FTP-628WSL Series is 120VAC or 120VAC/240VAC (via AC adaptor) or battery. The unit uses 2 inch wide paper. The mechanism and interface board is a standard multiple purpose unit.

The semi-rugged printer unit is most suitable for applications such as handheld, mobile and portable devices, as well as for various other equipment.



### ■ FEATURES

- Lightweight and ultra small size
- Easy paper loading
- Bluetooth®, infrared and serial interfaces
- 3.7V Lithion battery, 120 or 240 VAC adapter
- Drop-test - 1.5 meters
- Water resistant
- Prints 2-D barcodes
- 3 hour charge cycle
- Up to 6 paper rolls / charge  
(paper roll: approx. 15m)

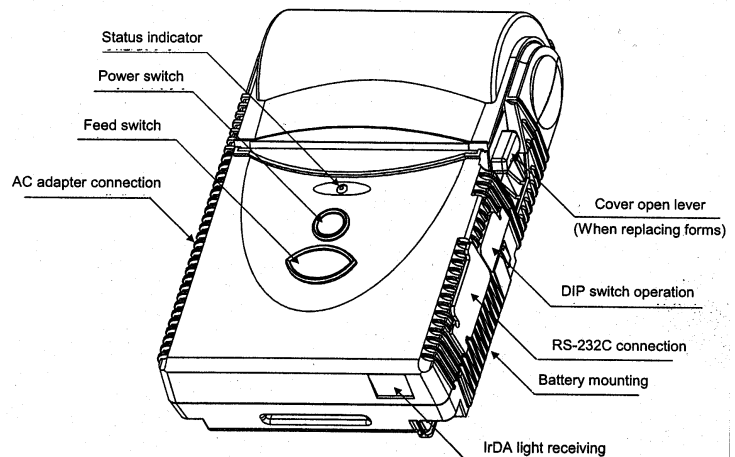

# FTP-628WSL110/120 Series

## ■ PART NUMBER

Item	Part Number
Bluetooth®, IrDA and serial interfaces	FTP-628WSL110#10 (includes 120V AC adapter, battery, belt clip and paper roll)
	FTP-628WSL110#20 (includes 120/240V AC adapter, battery, belt clip and paper roll)
IrDA and serial (RS-232C) interfaces	FTP-628WSL120#10 (includes 120V AC adapter, battery, belt clip and paper roll)
	FTP-628WSL120#20 (includes 120/240V AC adapter, battery, belt clip and paper roll)
Serial interface cable	FTP-628Y303

## ■ SPECIFICATIONS

Item		Specification
Part Number		FTP-628WSL110 / 120
Dot structure		384 dots / line
Dot pitch (horizontal)		0.125 mm
Dot pitch (vertical)		0.125 mm
Effective print area		48 mm
Paper width/diameter		58mm / ID 8mm, OD 36mm max.
Paper thickness		60 to 80µm *1
Maximum printing speed		Maximum 40mm/sec. (320 dotline/s) at 12.5% print ratio
Character types		Alphanumeric KANA: 159 International characters: 195 JIS KANJI: approx. 6800
Character dimensions (WxH mm), number of characters		12 x 24 dots (1.5 x 3.0mm), 32 columns 24 x 24 dots (3.0 x 3.0mm), 16 columns 8 x 16 dots (1.0 x 2.0mm), 48 columns 16 x 16 dots (2.0 x 2.0mm), 24 columns
Power	Battery	3.7VDC lithium ion battery
	AC Adapter	100VAC to 120VAC adapter #10 100VAC to 240VAC adapter #20 (AC cable not included)
Power consumption		1.6 A printing (print ratio 12.5%) standby 30-60mA
Dimensions (W X D X H)		84 x 136.5 x 30.0 mm body / 43.6mm paper holder
Weight		275 g (battery and belt clip included)
Expected Life	Head	Pulse durability: 100 million pulse/dot (25% print ratio) Wear resistance: 50Km
	Battery	One charge: 100m (at 12.5% printing ratio), 300 charge cycles
	Paper Holder	5000 times open / close

(continued)

# FTP-628WSL110/120 Series


## FTP-628WSL110/120 Specs continued

Item		Specification	
Bar Code Type		UPC-A, UPC-E, JAN13, JAN8, CODE 39, ITF, CODABAR, CODE 128, MAXI, PDF417, QR	
Interface	Serial	RS-232C	
	IrDA	Version 1.2 (Ir COMM protocol)	
	Bluetooth® *3	Version 1.1 (SPP profile)	
Safety Standard	Noise	FCC Class B, FCC Part 15	
	Water resistant	JIS C0920 Class 2	
Environmental conditions	Operating temperature	0° C to +50° C*4	
	Operating humidity	30 to 85% RH (no condensation)	
	Storage temperature	-20° C to +60° C	
	Storage humidity	5 to 90% RH (no condensation)	
Detection function	Head temperature	Detected by thermistor	
	Mark detect	Detected by photo-interruptor	
	Paper out	Detected by photo-interruptor	
	Cover open	Detected by micro-switch	
Major Function		Page mode Registration of character and image Enlarge characters Auto status reply	
Recommended thermal sensitive papers		High sensitive paper	TF50KS-E4 (Nippon paper)
		Standard Paper	FTP-020P0704 TF-60KS-E (Nippon paper), PD150R (Oji paper)
		Medium term paper	TF-60KS-F1 (Nippon paper), PD170R (Oji paper), P220VBB-1 (Mitsubishi paper), FH65BC-3H (Oji Film)
		Long term paper	PD160R-N (Oji paper), AFP-235 (Mitsubishi)

- Notes: \*1: There may be exceptions  
 \*2: ESC/POS™ Seiko/Epson trademark  
 \*3: FTP-628WSL110 only  
 \*4: 0 to +40°C guarantee of print quality

# FTP-628WSL110/120 Series

## ■ DIMENSIONS

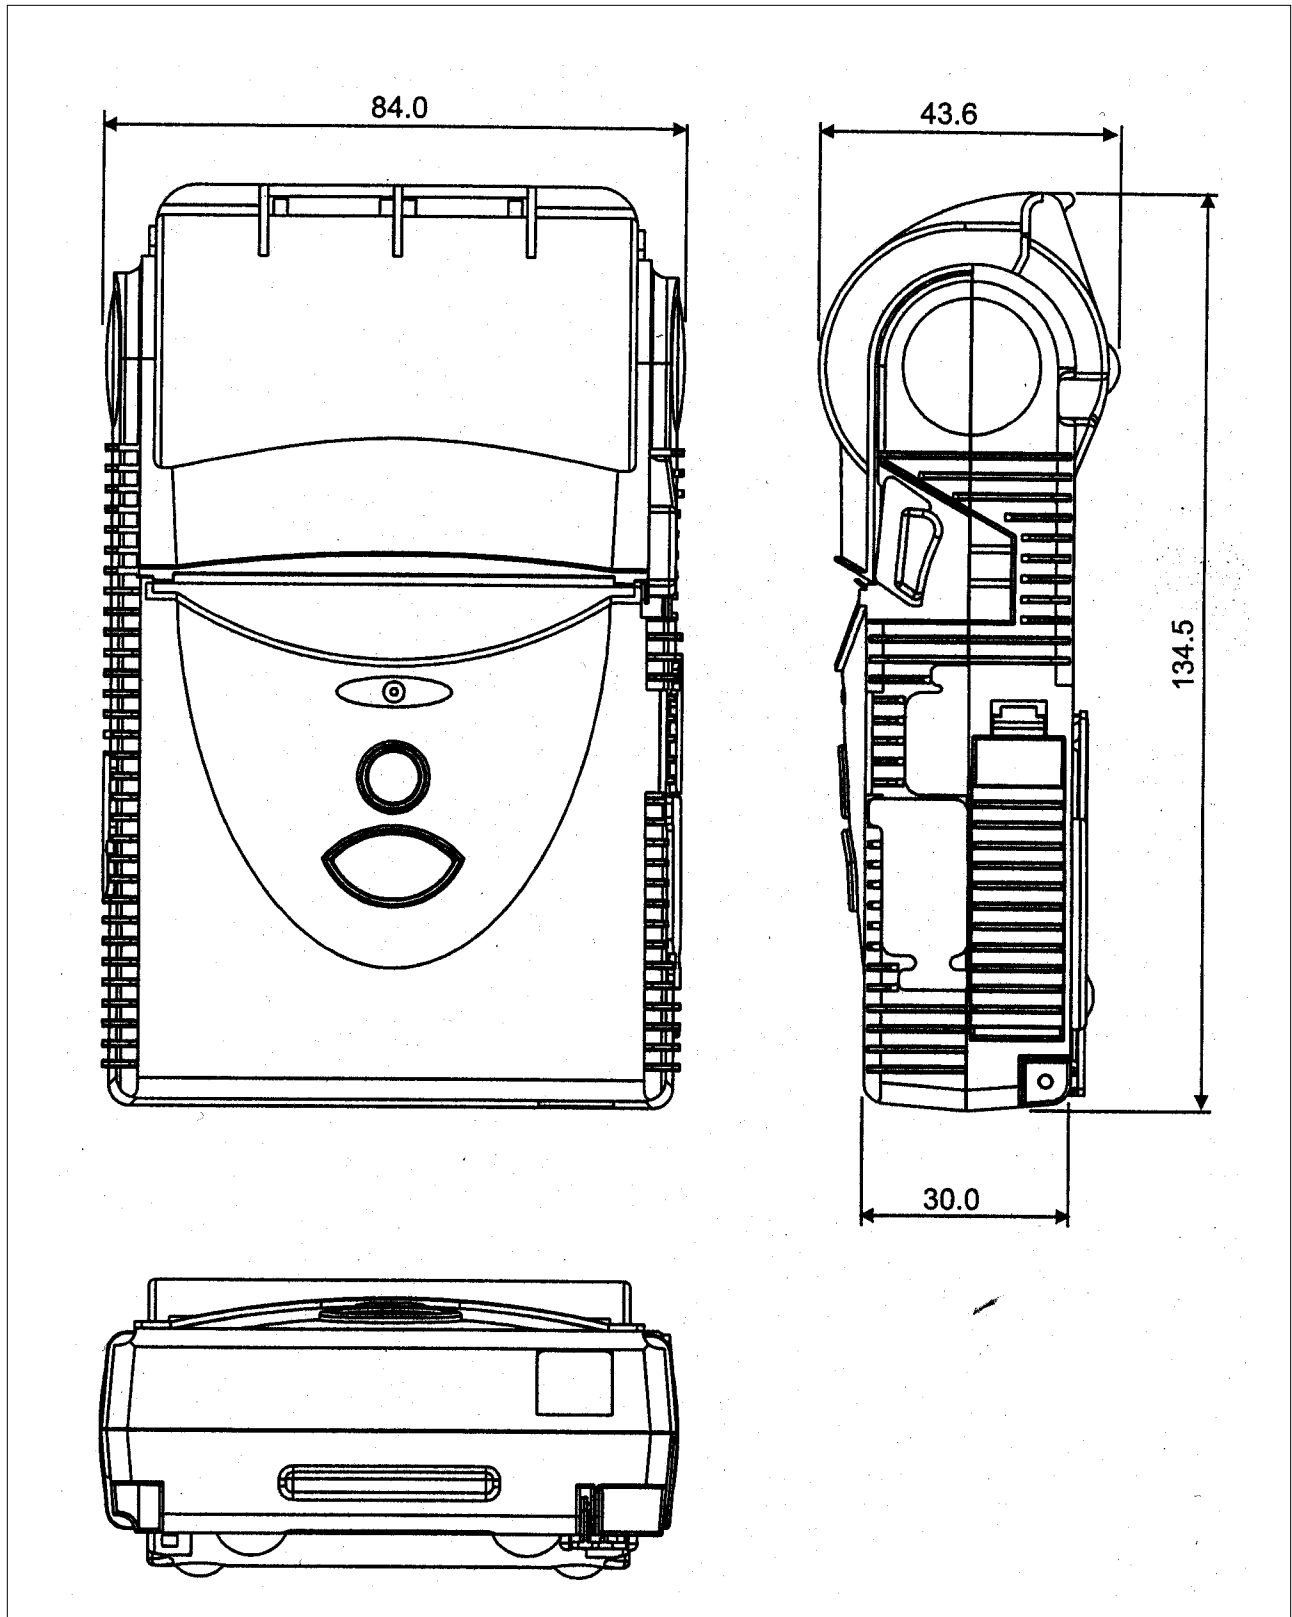

# FTP-628WSL110/120 Series

## ■ COMMANDS

Command	Contents
HT	Horizontal tab.
LF	Line feed.
FF	Form feed (new page).
ECS RS	Sets reverse printing.
ESC US	Resets reverse printing.
ESC FF	Data printing in page print mode.
ESC ! + n	Sets print mode.
ESC %+n	External registration character specification / cancellation.
ESC &+y+c1+c2+x+d1~dn	External registration character definition.
ESC *+m+n1+n2+[d1~dn]	Bit image printing.
ESC 3+n	Sets the line pitch.
ESC ?+n	External registration character deletion.
ESC @	Printer initialization.
ESC A+n	Sets the space between lines.
ESC C+n	Sets the page length by character line.
ESC D+n	Sets the tab position.
ESC J+n	Feeds paper in forward direction.
ESC K+n	Reverse paper feed.
ESC L	Page print mode selection.
ESC R+n	Selects international character.
ESC S	Line print mode selection.
ESC V+n	Right Rotation 90° specification / cancellation.
ESC W+x1+x2+y1+y2+Dx1+dx2+dy1+dy2	Print area setting in page print mode.
ESC X+m+n	Setting the turning time of the sleep mode.
ESC c+1+n	Sets internal processing.
ESC s+n	Print speed setting.
ESC {+n	Sets/resets upside down printing.
ESC Y SOH x a DLE + n	RS-232C communication setting.
FS !+n	Kanji printing mode collective specification.
FS &	Kanji printing mode specification.

# FTP-628WSL110/120 Series

Commands continued

Command	Contents
FS .	Kanji printing mode cancellation.
FS 9+n	Sets the detection functions.
FS C+n	Kanji code selection.
FS E+n	Correction of impressed energy.
FS r+n	Parameter transmission (valid for non-protocol mode).
GS \$+n+1+2	Vertical absolute position specification in page print mode.
GS &+m+x+y1+y2+[d]k	Registration of image data.
GS '+m+n	Prints registered image data.
GS <	Line feeds to the next mark.
GS A+m+n	Sets the line feed length after mark detection.
GS B+n	Sets the angle of the bar code.
GS E+n	Sets print quality.
GS a+n	Setting and cancelation of status transmission. (non-protocol mode).
GS e+n+m	Sets bar code width.
GS h+n	Sets bar code height.
GS k+m+n+d1~dN	Bar code printing.
GS k+m+k1+k2+k3+k4+d~	Two dimensional code printing.
GS (A ENQ	Bluetooth, information printing (WSL110 only).

<b>Fujitsu Components International Headquarter Offices</b>	<b>Japan</b> Fujitsu Components Limited Gotanda-Chuo Building 3-5, Higashigotanda 2-chome, Shinagawa-ku Tokyo 141, Japan Tel: (81-3) 5449-7010 Fax: (81-3) 5449-2626 Email: <a href="mailto:promothq@ft.ed.fujitsu.com">promothq@ft.ed.fujitsu.com</a> Web: <a href="http://www.fcl.fujitsu.com">www.fcl.fujitsu.com</a>	<b>Europe</b> Fujitsu Components Europe B.V. Diamantlaan 25 2132 WV Hoofddorp Netherlands Tel: (31-23) 5560910 Fax: (31-23) 5560950 Email: <a href="mailto:info@fceu.fujitsu.com">info@fceu.fujitsu.com</a> Web: <a href="http://www.fceu.fujitsu.com">www.fceu.fujitsu.com</a>
	<b>North and South America</b> Fujitsu Components America, Inc. 250 E. Caribbean Drive Sunnyvale, CA 94089 U.S.A. Tel: (1-408) 745-4900 Fax: (1-408) 745-4970 Email: <a href="mailto:marcom@fcai.fujitsu.com">marcom@fcai.fujitsu.com</a> Web: <a href="http://www.fcai.fujitsu.com">www.fcai.fujitsu.com</a>	<b>Asia Pacific</b> Fujitsu Components Asia Ltd. 102E Pasir Panjang Road #04-01 Citilink Warehouse Complex Singapore 118529 Tel: (65) 6375-8560 Fax: (65) 6273-3021 Email: <a href="mailto:fcai@fcai.fujitsu.com">fcai@fcai.fujitsu.com</a> Web: <a href="http://www.fcai.fujitsu.com">www.fcai.fujitsu.com</a>

© 2005 Fujitsu Components America, Inc. All company and product names are trademarks or registered trademarks of their respective owners. Rev. 05/12/2005.